


Finger tight hose adaptor


Supplied with nitrile or PTFE O-ring seal
For use with BSP union nut on previous page

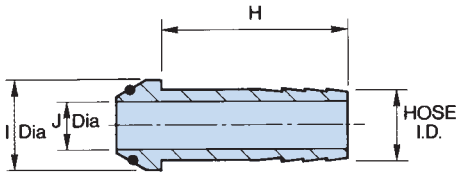

hose ID	part number	H	I dia	J dia
1/4"	FHA2	1.000"	0.437"	0.188"
3/8"	FHA3	1.125"	0.576"	0.312"
1/2"	FHA4	1.312"	0.730"	0.406"
3/4"	FHA6	1.500"	0.950"	0.640"
1"	FHA8	1.562"	1.188"	0.875"

Square hose adaptor


For use with BSP union nut on previous page

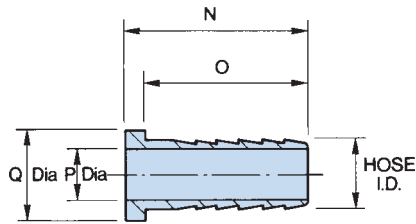

hose ID	part number	N	O	P dia	Q dia
1/4"	SHA2	1.100"	1.000"	0.188"	0.437"
3/8"	SHA3	1.225"	1.125"	0.312"	0.576"
1/2"	SHA4	2.000"	1.812"	0.406"	0.730"
3/4"	SHA6	2.000"	1.812"	0.640"	0.950"
1"	SHA8	2.000"	1.812"	0.800"	1.188"
1 1/4"	SHA10	1.900"	1.750"	1.000"	1.500"
1 1/2"	SHA12	2.275"	2.125"	1.281"	1.750"
2"	SHA16	2.475"	2.250"	1.750"	2.200"


Tube nipple 60° cone

For use with union nut on previous page
To be used for brazing or welding, supplied with O-ring to order

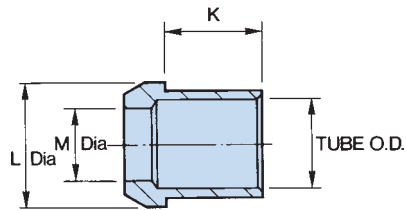

tube OD	part number	K	L dia	M dia
1/8"	TN1	0.250"	0.330"	0.093"
1/4"	TN2	0.320"	0.437"	0.180"
3/8"	TN3	0.400"	0.570"	0.300"
1/2"	TN4	0.550"	0.730"	0.420"
3/4"	TN6	0.790"	0.940"	0.680"
1"	TN8	1.000"	1.180"	0.930"
1 1/4"	TN10	1.250"	1.500"	1.180"
1 1/2"	TN12	1.500"	1.750"	1.420"
2"	TN16	1.650"	2.220"	1.900"

BSP male hose adaptor

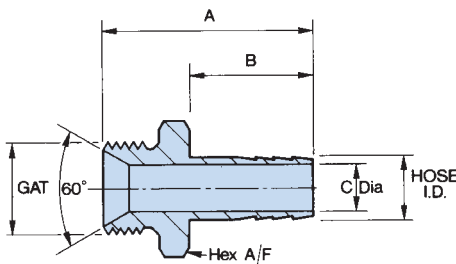

thread size GAT	hose ID	part number	A	B	C dia	hex A/F
1/8" BSP	1/4"	MH2/1	1.700"	1.000"	0.125"	0.750"
1/4" BSP	1/4"	MH2	1.700"	1.000"	0.188"	0.750"
1/4" BSP	3/8"	MH3/2	1.700"	1.000"	0.188"	0.750"
3/8" BSP	3/8"	MH3	1.780"	1.000"	0.312"	0.875"
1/4" BSP	1/2"	MH4/2	1.825"	1.125"	0.188"	0.750"
3/8" BSP	1/2"	MH4/3	1.905"	1.125"	0.312"	0.875"
1/2" BSP	1/2"	MH4	2.000"	1.125"	0.406"	1.125"
1/2" BSP	3/4"	MH6/4	2.412"	1.500"	0.437"	1.125"
3/4" BSP	3/4"	MH6	2.625"	1.500"	0.640"	1.300"
3/4" BSP	1"	MH8/6	2.687"	1.562"	0.687"	1.300"
1" BSP	1"	MH8	2.737"	1.562"	0.875"	1.670"
1 1/4" BSP	1 1/4"	MH10	2.987"	1.750"	1.093"	2.050"
1 1/2" BSP	1 1/2"	MH12	3.375"	2.125"	1.275"	2.220"
2" BSP	2"	MH16	3.687"	2.250"	1.812"	2.750"