



BSP – BSPT male union 3000lb class

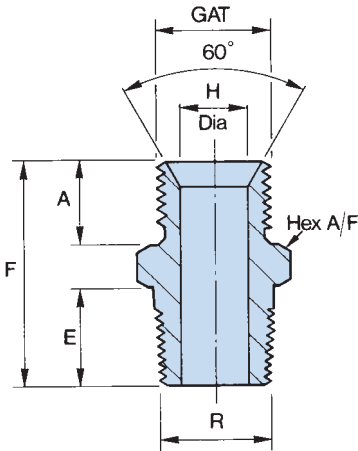

thread size GAT	thread size R	part number	A	E	F	H dia	hex A/F
1/8" BSP	1/8" BSPT	U1/N1	0.450"	0.375"	1.075"	0.125"	0.562"
1/4" BSP	1/8" BSPT	U2/N1	0.450"	0.375"	1.075"	0.197"	0.750"
1/4" BSP	1/4" BSPT	U2/N2	0.450"	0.500"	1.200"	0.250"	0.750"
1/4" BSP	3/8" BSPT	U2/N3	0.450"	0.562"	1.262"	0.250"	0.875"
1/4" BSP	1/2" BSPT	U2/N4	0.450"	0.687"	1.324"	0.250"	1.125"
3/8" BSP	1/8" BSPT	U3/N1	0.530"	0.375"	1.155"	0.197"	0.875"
3/8" BSP	1/4" BSPT	U3/N2	0.530"	0.500"	1.280"	0.250"	0.875"
3/8" BSP	3/8" BSPT	U3/N3	0.530"	0.562"	1.342"	0.375"	0.875"
3/8" BSP	1/2" BSPT	U3/N4	0.530"	0.687"	1.529"	0.375"	1.125"
1/2" BSP	1/4" BSPT	U4/N2	0.600"	0.500"	1.412"	0.250"	1.125"
1/2" BSP	3/8" BSPT	U4/N3	0.600"	0.562"	1.474"	0.375"	1.125"
1/2" BSP	1/2" BSPT	U4/N4	0.600"	0.687"	1.599"	0.500"	1.125"
1/2" BSP	3/4" BSPT	U4/N6	0.600"	0.750"	1.725"	0.500"	1.125"
1/2" BSP	1" BSPT	U4/N8	0.600"	0.875"	1.850"	0.500"	1.375"
3/4" BSP	1/2" BSPT	U6/N4	0.750"	0.687"	1.812"	0.500"	1.300"
3/4" BSP	3/4" BSPT	U6/N6	0.750"	0.750"	1.875"	0.687"	1.300"
3/4" BSP	1" BSPT	U6/N8	0.750"	0.875"	2.000"	0.687"	1.375"
1" BSP	1/2" BSPT	U8/N4	0.800"	0.687"	1.862"	0.500"	1.670"
1" BSP	3/4" BSPT	U8/N6	0.800"	0.750"	1.925"	0.687"	1.670"
1" BSP	1" BSPT	U8/N8	0.800"	0.875"	2.050"	0.875"	1.670"
1 1/4" BSP	1 1/4" BSPT	U10/N10	0.800"	0.906"	2.143"	1.125"	2.050"
1 1/2" BSP	1 1/2" BSPT	U12/N12	0.900"	0.937"	2.274"	1.375"	2.220"
2" BSP	2" BSPT	U16/N16	1.000"	1.062"	2.499"	1.750"	2.750"

BSP – NPTF male union 3000lb class

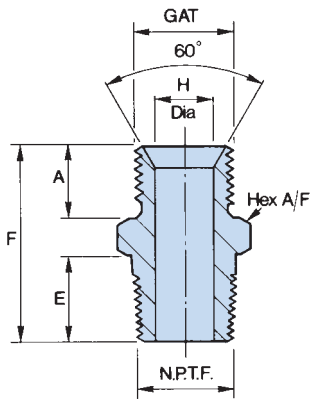

thread size GAT	thread size NPTF	part number	A	E	F	H dia	hex A/F
1/8" BSP	1/8" NPTF	U1/N1N	0.450"	0.375"	1.075"	0.125"	0.562"
1/4" BSP	1/8" NPTF	U2/N1N	0.450"	0.375"	1.075"	0.125"	0.562"
1/4" BSP	1/4" NPTF	U2/N2N	0.450"	0.500"	1.200"	0.250"	0.750"
1/4" BSP	3/8" NPTF	U2/N3N	0.450"	0.562"	1.262"	0.250"	0.750"
1/4" BSP	1/2" NPTF	U2/N4N	0.450"	0.687"	1.449"	0.250"	0.875"
3/8" BSP	1/8" NPTF	U3/N1N	0.530"	0.375"	1.155"	0.125"	0.875"
3/8" BSP	1/4" NPTF	U3/N2N	0.530"	0.500"	1.280"	0.250"	0.875"
3/8" BSP	3/8" NPTF	U3/N3N	0.530"	0.562"	1.342"	0.375"	0.875"
1/2" BSP	1/4" NPTF	U4/N2N	0.600"	0.500"	1.412"	0.250"	1.125"
1/2" BSP	3/8" NPTF	U4/N3N	0.600"	0.562"	1.474"	0.375"	1.125"
1/2" BSP	1/2" NPTF	U4/N4N	0.600"	0.687"	1.599"	0.500"	1.125"
1/2" BSP	3/4" NPTF	U4/N6N	0.600"	0.750"	1.725"	0.500"	1.300"
1/2" BSP	1" NPTF	U4/N8N	0.600"	0.875"	1.850"	0.500"	1.375"
3/4" BSP	1/2" NPTF	U6/N4N	0.750"	0.687"	1.812"	0.500"	1.300"
3/4" BSP	3/4" NPTF	U6/N6N	0.750"	0.750"	1.875"	0.687"	1.300"
1" BSP	1/2" NPTF	U8/N4N	0.800"	0.687"	1.862"	0.500"	1.670"
1" BSP	3/4" NPTF	U8/N6N	0.800"	0.750"	1.925"	0.687"	1.670"
1" BSP	1" NPTF	U8/N8N	0.800"	0.875"	2.050"	0.875"	1.670"
1 1/4" BSP	1 1/4" NPTF	U10/N10N	0.800"	0.906"	2.143"	1.125"	2.050"
1 1/2" BSP	1 1/2" NPTF	U12/N12N	0.900"	0.937"	2.274"	1.375"	2.220"
2" BSP	2" NPTF	U16/N16N	1.000"	1.062"	2.500"	1.500"	2.750"